


DURABLE/ECONOMICAL

# *models* **2250-51/4250-51** **RAISED PANEL PAN DOORS**

Built for both longevity and value, these 25-gauge doors re-create the elegant look of wood with a deeply embossed, distinctive panel design. They have the appearance of our top-of-the-line models, yet remain economical and efficient, making them some of our most popular doors. Available with insulation, in both short and long panels, and four designer colors, these durable steel doors complement the look of any home.

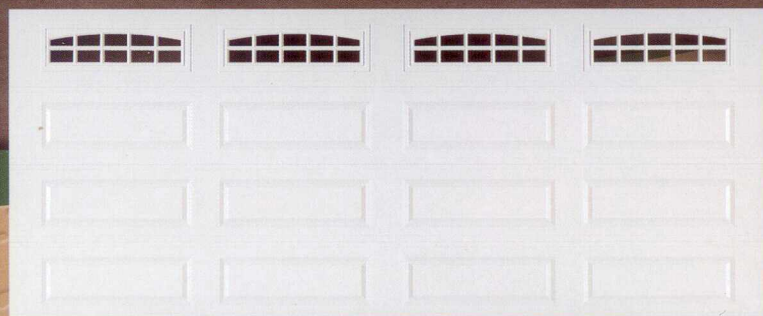

The Door to Quality.





## SPECIFICATIONS

- Door sections are formed from heavy, 25-gauge galvanized draw quality steel
- Section joints are roll-formed into a tongue-and-groove design which produces a superior weather seal
- Inside stiles are made of galvanized steel and stile holes are "dimpled" for increased holding power
- Bottom weather seal utilizes an aluminum retainer and extruded virgin vinyl
- Extra-heavy paint system consists of .25 mil. primer with rust inhibitor and a .75 mil. coating of baked-on polyester paint in your choice of white, almond, sandstone or brown
- Insulated models utilize an 1-3/8" polystyrene insulation with a vinyl back cover

## WINDOW & GLASS OPTIONS


Add a touch of elegance to the outside of your home with the addition of decorative window & glass options. These options are designed to enhance the natural beauty of the exterior while adding to the value of your home.

### DESIGNER LITES All Designer Lites are either transparent or semi-transparent.

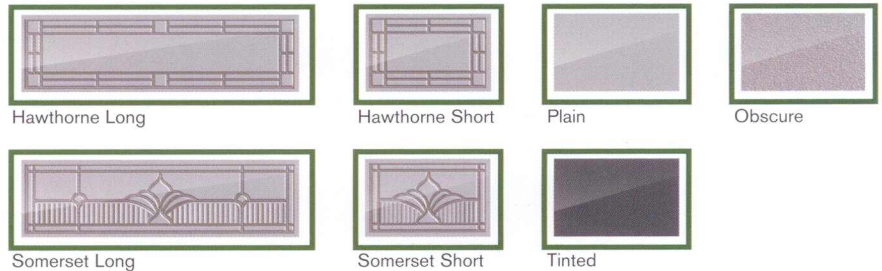


## PANEL CONSTRUCTION

Each model utilizes a 25 gauge exterior steel skin. Chosen for their weather resistant features, models (1) have no insulation, while models (2) utilize a 1-3/8" thick polystyrene insulation with a vinyl back cover.



**Insulated** R value\* - 6.62

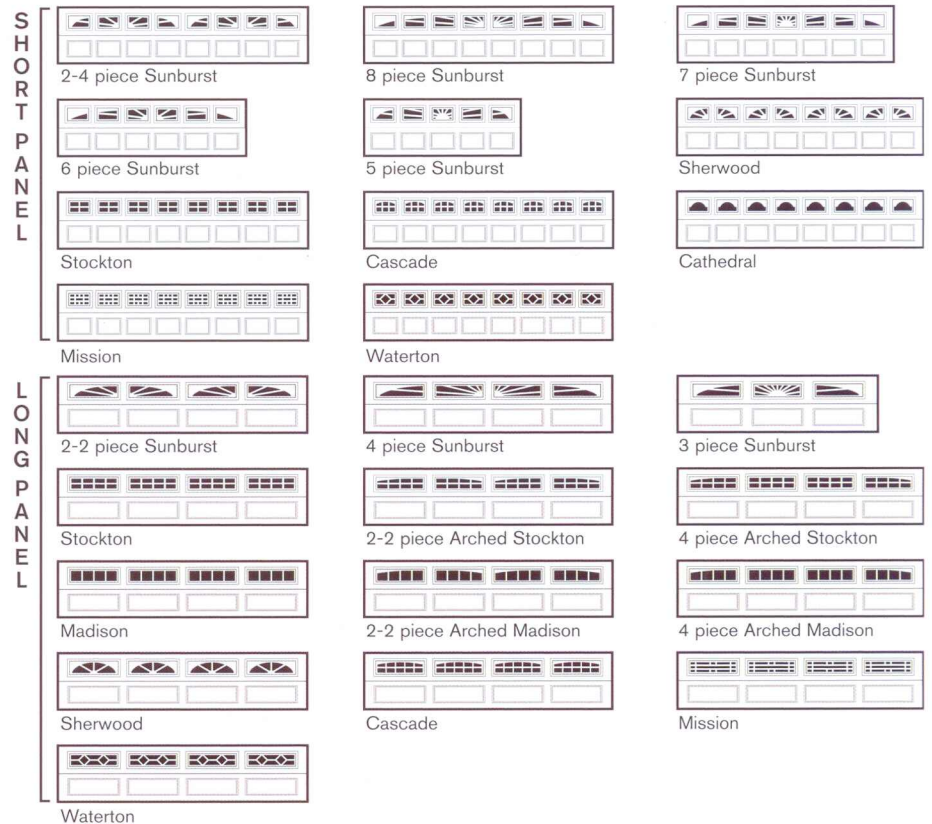

## COLOR SELECTIONS Refer to samples at your local distributor for exact color match.



The Door to Quality.

1485 SUNRISE DRIVE  
ARTHUR ILLINOIS 61911  
800-677-2650 F800-380-3667

\*Calculated door section R-value is in accordance with DASMA TDS-163.

Specifications are subject to change without notice.